



SEALED-BLOK™

Now part of



# TRUSTED. DURABLE. RELIABLE.

SRL WITH FIELD PROVEN  
TECHNOLOGY, RSQ™ FEATURE  
& RETRIEVAL CAPABILITIES



THE ULTIMATE IN FALL PROTECTION



## CONTENTS

Product Overview	2	Confined Space? No Problem	5
Typical Applications & Markets	2	Range Overview	6
Features & Benefits	3	Options & Accessories	7
Choose Your Mode	4	Why Choose Capital Safety?	8
Assisted Rescue Options 'Engage' The Descent Mode	4	For more information about our range of equipment visit our website at <a href="http://www.capitalsafety.com">www.capitalsafety.com</a>	

## PRODUCT OVERVIEW

### TRUSTED

DBI-SALA® continues to set the standard for quality in fall protection. The DBI-SALA® Sealed-Blok™ family has the most comprehensive line of sealed SRLs in the industry and decades of proven field service. **The best just got better...**

### DURABLE

- Stands up to the harshest environments
- Heavy-duty design
  - Corrosion resistant
  - Stainless steel end-plates
  - Aluminum housing

### RELIABLE

- Dynamic components sealed inside the housing (IP68 rated).
  - Protects from particles entering product
  - Protected against complete or continuous submersion in water
- Decades of service
- Field proven in the world's toughest environments
- Design extends maintenance intervals and product longevity

### TYPICAL APPLICATIONS

Offshore platform access  
 Confined space  
 Saltwater environments  
 Dirty environments

### TYPICAL MARKETS

Oil and Gas  
 Off-Shore Wind Energy  
 Mining  
 Marina  
 Utilities  
 Waste water treatment  
 Municipalities



# FEATURES & BENEFITS

## ANTI-RATCHETING DESIGN

Stays locked on rigid and non-rigid (horizontal lifeline) anchors

## NEW SEALED DESIGN (Patent Pending)

Ensures efficient, safe operation under all working conditions — the only SRL to meet IP68 sealed rating

## 140KG WEIGHT CAPACITY

Higher capacity for operator and tools

## CARRYING HANDLE

Built-in design for easy transport with improved ergonomics

## SECONDARY ANCHORAGE POINT

Certified for “dropped objects” protection Rated for fall arrest if primary anchor fails

## RETRIEVAL WINCH

## RSQ™ DUAL MODE DESIGN

Allows user to select between fall arrest mode and descent mode

## 5MM DIAMETER WIRE ROPE

Stainless steel for corrosion resistance

## SELF-LOCKING SWIVEL HOOK

Limits lifeline twisting

## 360LB GATE

Reduces chances of accidental disengagement (“roll-out”)

## IMPACT INDICATOR

Provides visual indication of Fall Arrest

## PIVOTING ANCHORAGE LOOP

Centres the load

## ALUMINUM HOUSING

Provides exceptional strength, durability and corrosion resistance

## STAINLESS STEEL END-PLATE

Durable construction for harsh environments

## TRIPOD/DAVIT ARM BRACKET

No tools required for install

## ERGONOMIC CABLE HANDLE

Provides added comfort and ease-of-use when making connections




Track inspection, control inventory and manage information

## GALVANISED AND STAINLESS STEEL CABLE

Abrasion resistant and corrosion resistant lifeline options

## FAST-LINE™

Provides the user with ability to replace the lifeline in the field

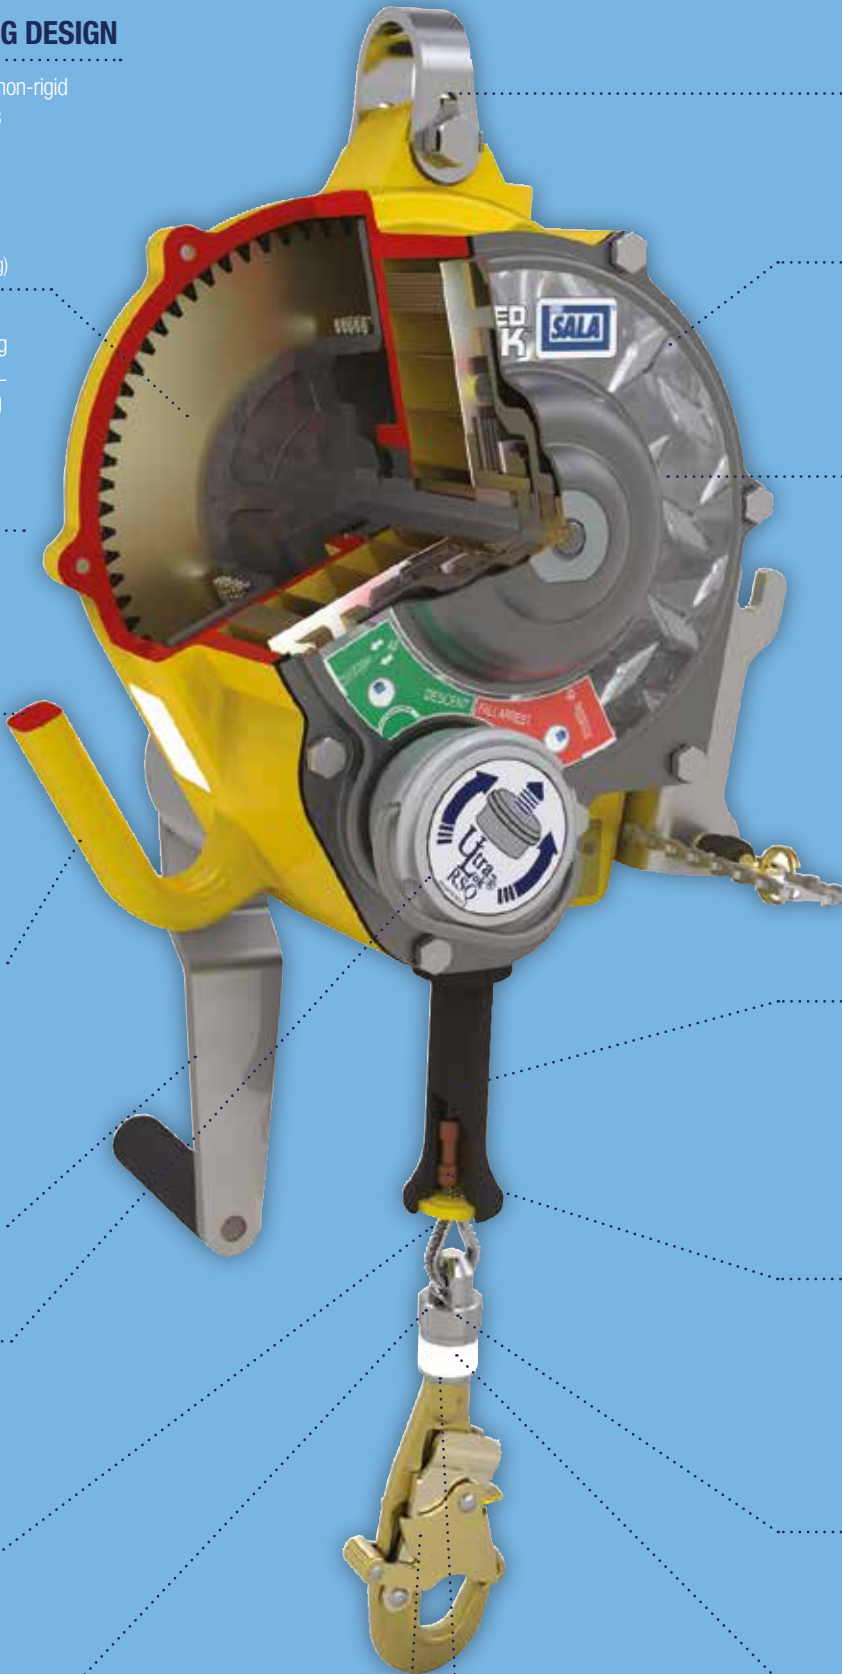

# WORLD'S FIRST DUAL-MODE SELF-RETRACTING LIFELINE FALL ARREST AND RESCUE



Exclusive design provides both fall arrest with assisted rescue capabilities and automatic self rescue for ultimate versatility.

- Built-in Rescue Device becomes an integral part of a Rescue Plan
- Standard fall arrest mode
- Automatic rescue mode
- Remote/Assisted activation

## CHOOSE YOUR MODE



### Fall Arrest Mode/Assisted Rescue

A speed sensing brake stops the fall, reduces forces imposed on the user to safe levels of 6kN or less and allows for assisted rescue to take place.



### Automatic Rescue Mode/Self Rescue Descent

A speed sensing brake slows the fall, then instantly a centrifugal brake activates, lowering the user at a controlled speed to the next level or ground.

## ASSISTED RESCUE OPTIONS 'ENGAGE' THE DESCENT MODE

Traditional assisted rescue operations may also be conducted.



### FALL ARREST MODE

Assisted Rescue by Pole



### FALL ARREST MODE

Assisted Rescue by Hand



### AUTOMATIC RESCUE MODE

Self Rescue Descent

# CONFINED SPACE? NO PROBLEM

The mechanical device is one of the most critical parts of a rescue system. It provides the means to retrieve an incapacitated worker to safety. Lifeline type and length are just a few of the options. A 3-way retrieval SRL can be used as either a primary or secondary device depending upon your application.

## 3-WAY RETRIEVAL SRL'S

### FEATURES:

- Raise and lower personnel
- Simple change in/out of Retrieval
- Stow away handle
- Optional bracket for davit attachment
- Available with RSQ™ Option
- For rescue use only



## FAST-LINE™ FIELD REPLACEABLE LIFELINE MODELS

### FEATURES:

- Provides trained End-Users with the ability to replace lifeline
- SRL will not operate if rebuilt improperly
- No need to break seal to replace lifeline
- Lowers overall cost of ownership



## TRUSTED IN THE FIELD

Safety engineers and site directors trust DBI-SALA® for the type of high quality, rugged systems that will ensure top performance when it is needed the most. Our systems meet applicable industry standards. We also customize solutions to suit customer needs.



3-way models with built-in emergency retrieval and mounting brackets are ideal for confined space rescue.

Available with and without mounting brackets.

## SEALED-BLOK™ RANGE OVERVIEW

Lifeline Material	Snap Hook Material	Retrieval Capability	RSQ™ Capability	140kg Weight Capacity	4.5 m	9 m	15 m	25 m	40 m	53 m
Galvanised Cable (5mm)	Steel			✓	3400828	3400803	3400950	3400866	3400971	3400656
			✓	✓				3400891		
		✓		✓		3400854	3400955	3400880		
		✓	✓	✓				3400916		
Stainless Steel Cable (5mm)	Stainless Steel			✓	3400830	3400805	3400951	3400867	3400972	3400658
			✓	✓			3400961	3400892		
		✓		✓		3400856	3400956	3400881	3400986	
		✓	✓	✓			3400944	3400917		
Weight					5.5 kg	9 kg	14.5 kg	20 kg	27 kg	56.5kg
Housing Material					Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Approximate Length					25 cm	29 cm	34 cm	39 cm	43 cm	43 cm
Approximate Width					19 cm	24 cm	27 cm	30 cm	35 cm	35 cm
Approximate Height					11 cm	14 cm	18 cm	18 cm	20 cm	31 cm
Retrieval Models*						✓	✓	✓	✓	
RSQ™ Model*							✓	✓	✓	
Fast-Line™ Field Replaceable Lifeline							✓	✓	✓	✓
140 kg Capacity					✓	✓	✓	✓	✓	✓
Meets IP68					✓	✓	✓	✓	✓	✓
Carrying Handle					✓	✓	✓	✓	✓	✓
Pivoting Anchorage Loop					✓	✓	✓	✓	✓	✓
i-Safe™					✓	✓	✓	✓	✓	✓
Tripod/Davit Arm Bracket (Optional)						✓	✓	✓	✓	
Ladder Bracket (Optional)					✓	✓	✓	✓	✓	✓
Snap Hook (Patented)					✓	✓	✓	✓	✓	✓
- 1633 kg Rated Gate					✓	✓	✓	✓	✓	✓
- Self-Locking Gate					✓	✓	✓	✓	✓	✓
- Swiveling Hook					✓	✓	✓	✓	✓	✓
- Impact Indicator on Hook					✓	✓	✓	✓	✓	✓
- ANSI Z359.1/ Z359.12 Compliant					✓	✓	✓	✓	✓	✓
5mm Diameter Wire Rope					✓	✓	✓	✓	✓	✓
Aluminum Housing					✓	✓	✓	✓	✓	✓
Stainless Steel End-Plate					✓	✓	✓	✓	✓	✓

\* Option available on selected models. Please check with your customer service representative.

## OPTIONS & ACCESSORIES



**FIRST-MAN-UP™ POLE**  
(2.4 - 4.8 m) with Assisted Rescue Tool

	kg
3500202	3.00



**REPAIR TOOL**

	kg
9600037	0.50



**MOUNTING BRACKET**  
for 9 m, 15 m, 25 m and 40 m Sealed-Blok™

	kg
3401025	0.30



**ASSISTED RESCUE TOOL ONLY**  
If you already have a First-Man-Up™ Pole

	kg
3500200	0.50



**SAFLOK™ STEEL CARABINER**  
Self Locking/Closing, 19 mm Gate Opening

	kg
2000112	0.25



**SAFLOK™ STEEL CARABINER**  
Self Locking/Closing, 30 mm Gate Opening

	kg
2000113	0.60



**SAFLOK™ STEEL CARABINER**  
Self Locking/Closing, 50 mm Gate Opening

	kg
2000114	0.66



**CABLE REPLACEMENT ASSEMBLY FOR FAST-LINE™**

	15 m	25m	40m	53m
Stainless steel cable with stainless steel hook	3900107	3900111	3900114	3900170
Galvanised cable with plated hook	3900105	3900108	3900112	3900168



a 3M company

Now part of



## GLOBAL LEADER IN FALL PROTECTION

### Capital Safety is the Global leader in fall protection equipment, systems and anchors.

Capital Safety est le leader mondial en matière d'équipement, de systèmes et d'ancrages de protections antichute.

Capital Safety ist weltweit führend auf dem Gebiet von Absturzsicherungs-ausrüstung, -systemen und Anschlagmöglichkeiten.

Capital Safety es el líder mundial en equipos, sistemas y anclajes de protección contra caídas.

Capital Safety is wereldleider in valbeveiligingsapparatuur, -systemen en verankeringen.

Capital Safety è leader globale nell'anticaduta per dispositivi di protezione individuale, sistemi e ancoraggi.

Capital Safety är globala inom utrustning, system och förankringar för fallskydd.

### EUROPE, MIDDLE EAST & AFRICA

#### UK

5a Merse Road, North Moons Moat  
Redditch, B98 9HL, UK  
t: +44 (0) 1527 548 000  
f: +44 (0) 1527 591 000

#### FRANCE

Le Broc Center, Bâtiment A  
Z.1. 1re Avenue – BP15  
06511 Carros Le Broc, Cedex, FRANCE  
t: +33 (0) 4 97 10 00 10  
f: +33 (0) 4 93 08 79 70

#### GERMANY

Hagener Straße 44  
57489 Drolshagen, GERMANY  
t: +49 (0) 2 76 18 33 82 29  
f: +49 (0) 2 76 18 33 81 93

#### DUBAI

P.O. BOX 17769, Jebel Ali Free Zone  
Jafza Lobby N° 15, Office N° 15315  
(3rd Floor), DUBAI – UAE  
t: +971 (4) 88 11 4 66  
f: +971 (4) 88 11 4 67

All rights reserved. The material contained herein is copyrighted; no part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise without prior written permission from Capital Safety.

### CUSTOMER SERVICES

00 800 999 55500

information@capitalsafety.com

capitalsafety.com



@CapitalSafetyUK  
facebook.com/CapitalSafety  
youtube.com/CapitalSafetyEMEA

Ref: 9701637