

Product leaflet

Product

Protective hood

Model No.

SR 345

SR 346

Ordering No.

H09-1012

H09-1112

Product Description

The protective hood is designed for use together with the SR 90-2, SR 90-3 and SR 100 half mask and the SR 200 full face mask with filters or SR 307 compressed air attachment, and with the SR 90 Airline. The hood is made of chemicals-resistant materials and provides protection against splashing and dripping of most solvents and acids in relatively low concentrations. However, the material may be affected by extended contact with certain solvents in liquid form.

The hood is extra roomy, so that both a safety helmet and ear protectors can be worn under the hood, if necessary. The SR 345 hood extends over the user's shoulders, back and chest. The SR 346 hood is extended so that it covers the top part of the user's body. The visor is treated to prevent misting.


The hood can be machine-washed about 10 times – without spin-drying – at a maximum of +40 °C.

Technical specification

SR 345, SR 346

Service temperature	-10 – +55 °C, < 90 % RH
Storage temperature	-20 – +40 °C, < 90 % RH
Weight SR 345	≈ 200 g
Weight SR 346	≈ 410 g
Resistance to chemicals	Requisition list from Sundström Safety AB
Approval	CE Category 1

- A. Hood**
- B. Visor**
- C. Half mask**
- D. Filter combination**
- E. Exhalation valve (two)**

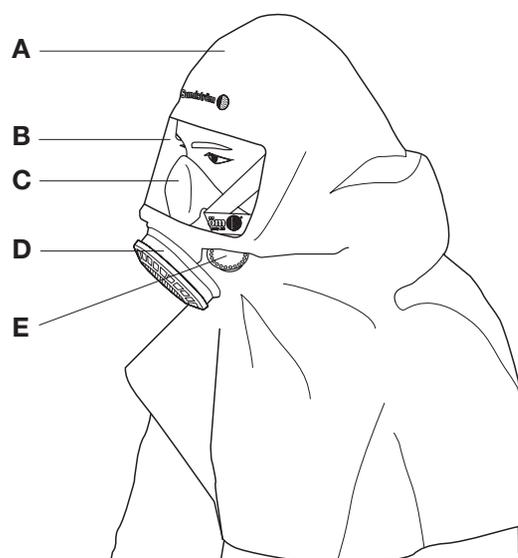

SR 345



Head Office

Tel: +46-(0)8-562 370 00
Fax: +46-(0)8-562 370 20

P.O. Box 10056
SE-181 10 Lidingö
Sweden

Visiting address:
Vasavägen 84
SE-181 10 Lidingö

Factory

Tel: +46-(0)8-562 370 00
Fax: +46-(0)8-562 370 60

P.O. Box 76
SE-340 14 Lagan
Sweden

Visiting address:
Västergatan 4
SE-340 14 Lagan

Sundström 
www.srsafety.com